World Headquarters: ITALY
SAATI S.p.A
Phone: (+39) 031 9711 - Fax: (+39) 031 93392
E-mail: info.IT@saati.com

Filtration technical data sheet

SAATIBELT PES 8.400 HDS

Special Belting Solution for Pasta Drying

Designed and manufactured with a new fiber, SAATIBELT PES 8.400 HDS meets the requirements of sizeable belts.

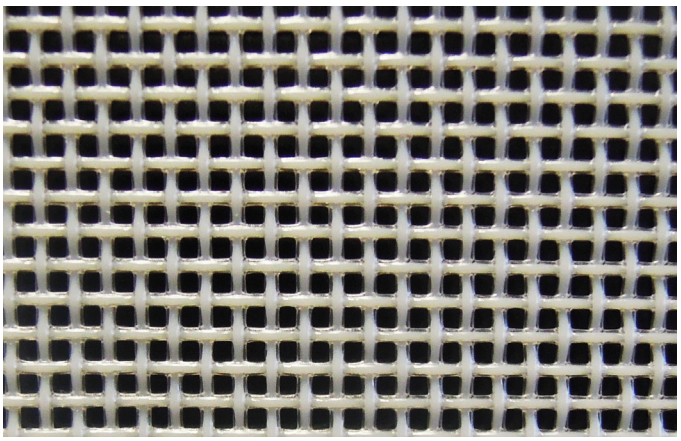

Key-Features:

- New fiber generation
- Excellent dimension stability
- Smooth surface
- Hydrolisis resistance
- FDA polymer approved
- Excellent protection from moisture
- Edge and joint customization

TECHNICAL DATA	
PRODUCT NAME	Saatibelt® PES 8.400 HDS
WARP / WEFT COMPOSITION	Polyester
MESH OPENING	710 µm
OPEN AREA	30 %
WEIGHT	250 [g/m²]
THICKNESS	690 µm
AVAILABLE WIDTHS	up to 3500 mm
MAX. WORKING TEMPERATURE	140 [°C]
AIR PERMEABILITY @200mmWG	6500 l/m²/s

Main Applications:

Company Profile

SAATI is leader in the production and distribution of dryer, conveyor and filter belts used in many applications. The SAATIBELT® line of products is manufactured from technically advanced fibers that offer the highest resistance, reliability and durability. SAATIBELT® conveyors are fabricated to customer's exact specifications in UNI EN ISO 9001 certificatd facilities.

The listed technical specifications are referred to mean values of production samples.
In accordance with our policy of continuosly improving our products, the above technical specifications are subject to change without any notice.